




High-Pressure Hose **A0695** (2500 bar)

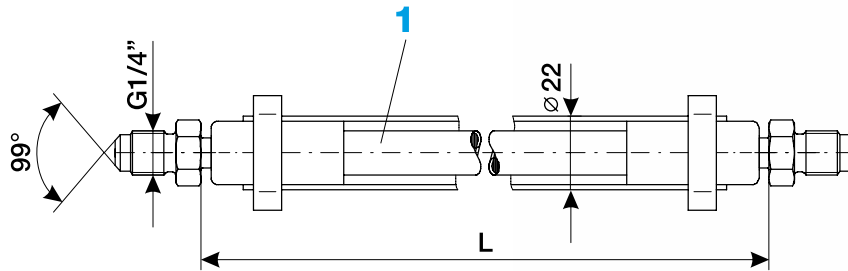

Lengths available from stock

for pre-assembled and pressure-tested high-pressure hose

| Art. No. | Designation |
|-------------|---------------------------------|
| A069500.22 | High-pressure hose 0.220 m long |
| A069500.27 | High-pressure hose 0.270 m long |
| A069500.34 | High-pressure hose 0.340 m long |
| A069500.5 | High-pressure hose 0.5 m long |
| A069500.55 | High-pressure hose 0.550 m long |
| A069500.557 | High-pressure hose 0.557 m long |
| A069500.6 | High-pressure hose 0.6 m long |
| A06950001 | High-pressure hose 1.0 m long |
| A06950001.5 | High-pressure hose 1.5 m long |
| A06950001.7 | High-pressure hose 1.7 m long |
| A06950001.8 | High-pressure hose 1.8 m long |
| A06950002.1 | High-pressure hose 2.1 m long |

| Art. No. | Designation |
|-----------|--------------------------------|
| A06950002 | High-pressure hose 2.0 m long |
| A06950003 | High-pressure hose 3.0 m long |
| A06950004 | High-pressure hose 4.0 m long |
| A06950005 | High-pressure hose 5.0 m long |
| A06950006 | High-pressure hose 6.0 m long |
| A06950007 | High-pressure hose 7.0 m long |
| A06950008 | High-pressure hose 8.0 m long |
| A06950009 | High-pressure hose 9.0 m long |
| A06950010 | High-pressure hose 10.0 m long |
| A06950015 | High-pressure hose 15.0 m long |
| A06950020 | High-pressure hose 20.0 m long |

Other lengths are available at short notice upon request, as these are assembled by SCHAAF.

| Item | Designation | Article No. |
|------|-------------------------------------|-------------|
| 1 | High-pressure hose A0695 ... m long | A0695.... |

Hose specifications

All high-pressure hoses are fitted with an additional protective hose. The data printed on the high-pressure hose:

-SCHAAF- 41812-ERKELENZ-GERMANY/EN/HDS2500/5/XQJJ/PN2500

EN Standard Quality Assurance

All high-pressure hoses are checked for material quality, dimensional accuracy, correct functioning and load-resistance. During order execution, they are subject to continuous quality assurance measures and are supplied together with detailed technical information.

Hose type

Nominal diameter

max. operating pressure in bar

e.g. 4Q05 (4th quarter 2005)


www.schaaf-gmbh.com

SCHAAF develops and produces world leading technology in the field of joining technique in all sectors of the industry.





High-Pressure Hose **A0695** (2500 bar)

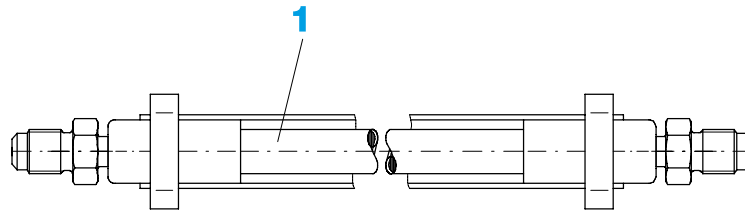

Caution!! High-Pressure Hydraulics

If leaks occur when pressure is being applied, always relieve the hydraulic pressure immediately and either seal

| | |
|---|---|
| Max. operating pressure for item 1: | 2500 bar |
| Test pressure for item 1: | 4650 bar |
| Bursting pressure for item 1: | 6200 bar |
| Inner tube: | POM |
| Pressure jacket: | 6 spiralled layers of corrosion-proof high tensile steel |
| Outer sheath: | PA, Nylon |
| Protective hose: | PVC |
| Inside diameter: | 5.0 mm |
| Outside diameter: | 13.0 mm |
| Outside diameter incl. protective hose: | 22.0 mm |
| Weight: | 0.43 kg/m |

Caution!! The high-pressure hose and all pressure-carrying parts associated with it, must always be inspected for damage before pressure is applied. Damaged parts must immediately be replaced by new parts.

It is only permitted to use hydraulic oils for transferring pressure. Other fluids may only be used with the express approval of SCHAAF. The high-pressure hose must never be subjected to mechanical stress or kinking. The minimum bending radius is 175 mm. The permissible ambient and contact temperature is between -40 °C and +100 °C. It is recommended to replace the high-pressure hose with a new hose, at the latest, every 5 years. Earlier replacement is recommended if the hose is subject to extreme conditions. The maximum cycles-to-failure count can be assumed to be 10,000. Dirt, contamination, mechanical damage and very high or low temperatures can reduce the cycles-to-failure count considerably. Contact us if you have any questions in this respect.

Fitting information: If the high-pressure hose is fitted with quick-release coupling sleeves or nipples, a pressure build-up can occur as a result of the oil in the high-pressure hose heating up to a high temperature, making connection impossible.

If this is the case, a connection point must be loosened so that the pressure inside the high-pressure hose can decrease. When the pressure has decreased, the loosened connection must be properly tightened.

Other products manufactured by SCHAAF

- Bolt tensioners
- Hydraulic nuts
- High-pressure hydraulic pumps:
manually operated, electrically or pneumatically driven
- Couplings, nipples, adapters, distributors up to 4000 bar
- ExpaTen, EcoRolls and many more

Complete solution from SCHAAF

The high-pressure hydraulic hoses, connection couplings and adapters are all aligned to function with SCHAAF high-pressure hydraulic tools and high-pressure hydraulic generators = 100% system solution.

www.schaaf-gmbh.com

SCHAAF develops and produces world leading technology in the field of joining technique in all sectors of the industry.

SCHAAF GmbH & Co. KG · Bruesseler Allee 22 · 41812 Erkelenz - Germany · Phone: +49 - 24 31 - 9 77 70-0 · Fax: +49 - 24 31 - 9 77 70-77 · E-Mail: info@schaaf-gmbh.com

